


creLED

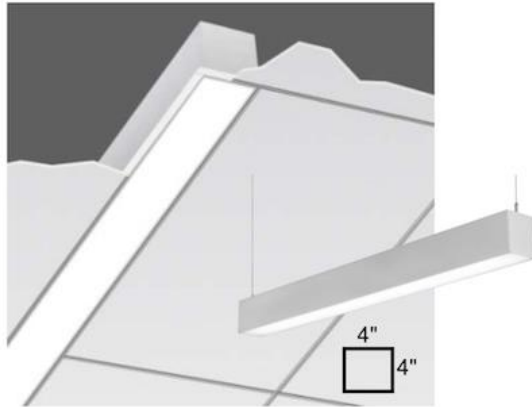

Key Features:

EASY TO SPECIFY, OPTIONAL EM BATTERY

Standard Model:	CRE-181802SLOT-LENGTH*-4.5WF-WH-MOUNTNG*
Available Options:	* 2' 4' or 8'; -R Recess (Advise Ceiling), -S Surface, -P Pendant, -W Wall; -EM Battery
Nominal Dimensions:	4.0" Nominal Cross Section in 24", 48" or 96" Nominal Complete Fixture Lengths
Housing Specifications:	Code Gauge Steel Housing (Aluminum is Available), Premium Baked White Enamel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, 4.5 Watts per Foot (May Double Output), 575 Lumens per Foot, >82 CRI, 3K-4K
Energy Efficiency:	127 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	-R Recessed, -S Surface, -P Pendant (Aircraft Cable by Other) or -W Wall
Standards & Codes:	UL Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**