


# creLED

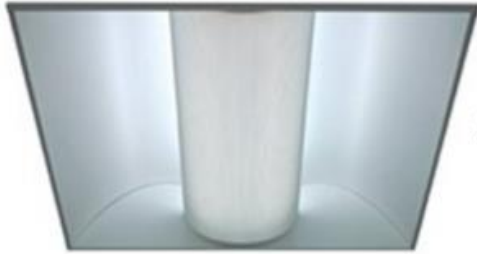

2'x2' or 2'x4'  
Recessed

## Key Features:

**INDIRECT, OPTIONAL BATTERY BACKUP**

Recessed 2X2 Model:	<b>CRE-221802CB-22-18L-PS*</b>
Recessed 2X4 Model:	<b>CRE-221802CB-24-34L-PS*</b>
Available Options:	* Change <b>PS</b> (Perforated Steel) to <b>AL</b> for Acrylic Lens; Suffix <b>-EM</b> for Battery Backup
Nominal Dimensions:	24" x 24" x 5.5" Depth ... or 24" x 48" x 5.5" Depth
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Perforated Steel (Standard) or DURAC Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, >82 CRI, 3K-4K; 2X2 @ 18W/2300 Lumens, 2X4 @ 34W/4400 Lumens
Energy Efficiency:	127 (2X2) or 129 (2X4) LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Recess in Standard Acoustic Tile (Standard) or Gypsum Board (-Add Suffix <b>-FL</b> ) Ceilings
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

**Thank you for considering creLED quality light fixtures.** Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**