


creLED

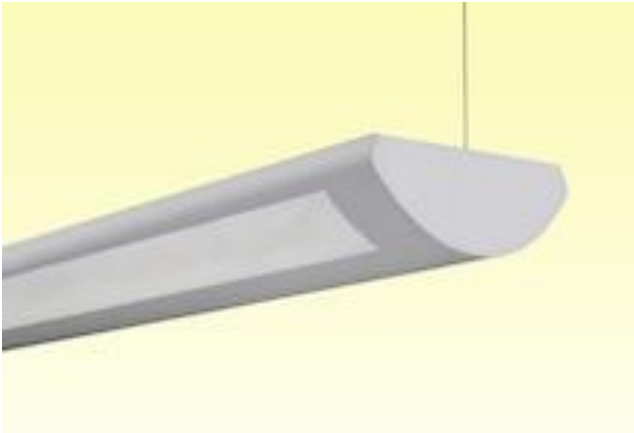

Key Features:

4', 8' or EXTENDED LENGTH

Standard Model:	CRE-391802CURVE-LENGTH*-4.5WF-WH
Available Options:	* 4', 8' or Advise Length (in 4' Multiples); Suffix -EM for Emergency Battery Backup
Nominal Dimensions:	11.9" Nominal Cross Section x 2.5" Depth x Fixture Length (in multiples of 4')
Housing Specifications:	Code Gauge Steel Housing, Premium Baked White Enamel
Diffuser Specifications:	Perforated Steel Screen; Opal Thermoplastic Overlay; Asbestos Free; UV Stabilized
Lamp Specifications:	LED, 4.5 Watts per Foot (May Double Output), 575 Lumens per Foot, >82 CRI, 3K-4K
Energy Efficiency:	127 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	30" Field-Adjustable Aircraft Cable (Supplied with Fixture)
Standards & Codes:	UL Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**