

creLED



I-----2FT or 4FT-----I
Surface Wall (or Ceiling)

Type:	
Model:	
Project:	
Notes:	

Key Features:

BI-LEVEL FOR STAIRS, ADA COMPLIANT

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 24" Model:	CRE-241802STAIR-24-18L-BILEVEL-EM* (Standard with Bi-level Sensor & EM Battery)
Standard 48" Model:	CRE-241802STAIR-48-34L-BILEVEL-EM* (Standard with Bi-level Sensor & EM Battery)
Available Options:	* Delete EM Suffix When no Emergency Battery Backup is Required
Nominal Dimensions:	24" or 48" Length x 4.5" Width x 3.5" Depth for ADA Compliance
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, >82 CRI, 3000K-4000K; 24" @ 18W/2300 Lumens, 48" @ 34W/4400 Lumens
Energy Efficiency:	127 (24") or 129 (48") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount to Recessed J-Box Facing Stair Treads (May Ceiling Mount)
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source, ADA
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



I----- 2FT or 4FT -----I
Surface Ceiling, Wall or Stem Mount

Type:	
Model:	
Project:	
Notes:	

Key Features:

VANDAL; EM & MOTION AVAILABLE

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 24" Model:	CRE-261802VANDL-24-18L
Standard 48" Model:	CRE-261802VANDL-48-34L
Available Options:	* Add -EM Suffix for Battery Backup; -MS100 Suffix for Full-On/Off Motion Sensor
Nominal Dimensions:	24.0" or 48.0" Length x 4.5" Width x 4.5" Depth
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Clear Prismatic Vandal-Resistant Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, >82 CRI, 3000K-4000K; 24" @ 18W/2300 Lumens, 48" @ 34W/4400 Lumens
Energy Efficiency:	127 (24") or 129 (48") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall or Ceiling Mount to Recessed Junction Box; Stem or Chain Mount
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



I-----4FT-----I
Surface Ceiling or Stem Mount

Type:	
Model:	
Project:	
Notes:	

Key Features:

FOR LOW PRESSURE GAS METER ROOMS

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 48" Model:	CRE-281802GASX-48-34L-LPG
Available Options:	Add Suffix -EM for Integral Battery Backup; Add Suffix -MS100 for Full On/Off Sensor
Nominal Dimensions:	52.0" Long x 6.75" Wide x 4.5" High
Housing Specifications:	Gray/White Thermoplastic Body with Code Gauge Steel Electrical Compartments
Diffuser Specifications:	Clear Prismatic Trans-Apex DURAC Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, 34 Watts, 4400 Lumens, >82 CRI, 3000K-4000K
Energy Efficiency:	129 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Pendant/Chain Mount; 7/8" Knockouts for Direct Conduit Entry
Standards & Codes:	UL Listed Wet Location, NEC 1.08, NYC DOB (IBC), NJEC, IP67, DLC LP Source; OSHA
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



I-----4FT-----I
Surface Ceiling or Stem Mount

Type:	
Model:	
Project:	
Notes:	

Key Features: FOR PARKING GARAGES

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 48" Model:	CRE-291802PARK-48-34L
Available Options:	Add Suffix -EM for Integral Battery Backup; Add Suffix -MS50 for Bi-Level Sensor
Nominal Dimensions:	52.0" Long x 6.75" Wide x 4.5" High
Housing Specifications:	Gray/White Thermoplastic Body with Code Gauge Steel Electrical Compartments
Diffuser Specifications:	Clear Prismatic Trans-Apex DURAC Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, 34 Watts, 4400 Lumens, >82 CRI, 3000K-4000K
Energy Efficiency:	129 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Pendant/Chain Mount; 7/8" Knockouts for Direct Conduit Entry
Standards & Codes:	UL Listed Wet Locations, NEC 1.08, NYC DOB (IBC), NJEC, IP67, DLC LP Source
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



15" High
Surface Wall
Mount

Type:	
Model:	
Project:	
Notes:	

Key Features: FOR ELEVATOR PIT WALLS

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 48" Model:	CRE-301802PIT-15-10L
Available Options:	Add Suffix -CLG for Ceiling Mount Version
Nominal Dimensions:	15.0" High x 7.50" Wide (Cylinder) x 12.5" Maximum Extension from Wall
Housing Specifications:	Polyester Powder Coat Durable Gray Finish over Code Gauge Cast Aluminum
Diffuser Specifications:	Clear Tempered KAYMAR Glass Under Matching Gray Cast Aluminum Protective Cage
Lamp Specifications:	LED, 10 Watts, 800 Lumens, >80 CRI, 4000K-5000K
Energy Efficiency:	80 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount (see Available Options Above for Ceiling Mount Version)
Standards & Codes:	CSA Listed Wet Locations, NEC 1.08, NYC DOB (IBC), NJEC, IP65 Rated
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



I----- 11" or 14" -----I
Surface Ceiling (or Wall)

Type:	
Model:	
Project:	
Notes:	

Key Features:

SHATTERPROOF, MAY WALL MOUNT

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 11" Model:	CRE-031802LEDR-11-15L-WH
Standard 14" Model:	CRE-031802LEDR-14-24L-WH
Available Options:	Please Browse Through our Other Fixtures to Meet Your Project Needs
Nominal Dimensions:	11.0" Diameter x 4.0" Depth ... or 14.0" Diameter x 4.0" Depth
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, >80 CRI, 27K-4K; 11" @ 15W/1100 Lumens, 14" @ 24W/1578 Lumens
Energy Efficiency:	73 (11") or 65 (14") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



I-----21"-----I
Surface Ceiling

Type:	
Model:	
Project:	
Notes:	

Key Features:

TAPERED DESIGN, SHATTERPROOF

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-091802660-21-39L-BN
Available Options:	May Change BN (Brushed Nickel) to WH (White) or PB (Polished Brass)
Nominal Dimensions:	21.0" Diameter x 4.0" Depth
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth White KAYMAR Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 39 Watts, 4000 Lumens, >81 CRI, 3000K-4000K
Energy Efficiency:	102 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling Mount to Recessed Junction Box
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



4" Shallow Recessed

Type:	
Model:	
Project:	
Notes:	

Key Features:

OPTIONAL EM BATTERY, CUSTOM COLORS

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Shallow Round Model:	CRE-1618024EMR-4RD-20L-WH
Shallow Square Model:	CRE-1618024EMR-4SQ-20L-WH
Available Options:	-EM for Field-Install Battery, -SWW for Square Wall Wash, -CC for Custom Color
Nominal Dimensions:	Trims: 4.0" ID, 5.75" OD; Housing: 14" L x 11.5" W x 4" Depth for Shallow Ceilings
Housing Specifications:	Heavy Code Gauge Steel, IC Rated for Insulated or Non-Insulated Ceilings
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 20 Watts, 1350 Lumens, >85 CRI, 3000K-4000K
Energy Efficiency:	67 LPW (Lumens per Watt), NYECC & NYSEDA Compliant
Mounting Type:	Recessed Ceiling Mount for Standard Acoustic Tile or Gypsum Board Ceilings
Standards & Codes:	UL Listed Dry, Damp or Wet Locations, IC, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



----- 2FT or 4FT -----
Surface Wall (or Ceiling)

Type:	
Model:	
Project:	
Notes:	

Key Features:


ADA, EM AVAILABLE, SHATTERPROOF

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 24" Model:	CRE-251802HALL-24-18L
Standard 48" Model:	CRE-251802HALL-48-34L
Available Options:	* Add -EM Suffix for Battery Backup; Add -MS Suffix for Bi-Level Motion Sensor
Nominal Dimensions:	24" or 48" Length x 4.5" Width x 3.5" Depth for ADA Compliance
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, >82 CRI, 3000K-4000K; 24" @ 18W/2300 Lumens, 48" @ 34W/4400 Lumens
Energy Efficiency:	127 (24") or 129 (48") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall or Ceiling Mount to Recessed Junction Box
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source, ADA
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED

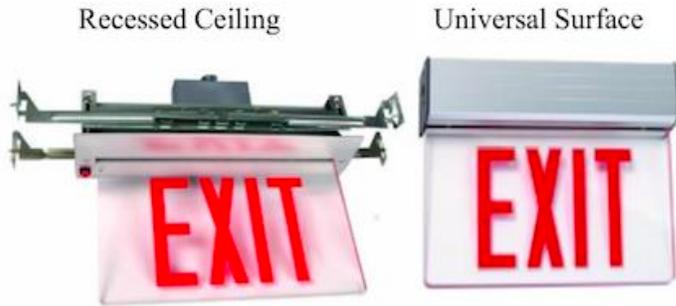

Type:	
Model:	
Project:	
Notes:	

Key Features:

USA & NYC APPROVED, SHATTERPROOF

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

USA/NYC 8" Recessed:	CRE-311802PANEX-8R-2F-RM-BA
USA/NYC 6" Recessed:	CRE-311802PANEX-6R-2F-RM-BA
USA/NYC 8" Surface:	CRE-311802PANEX-8S-2F-RM-BA
USA/NYC 6" Surface:	CRE-311802PANEX-6S-2F-RM-BA
Available Options:	May Change Standard Suffix -BA (Brushed Aluminum) to -WH for White Housing
Nominal Dimensions:	8R = 10" H x 17" W x 4" D; 6R = 8" x 15" x 4" D; 8S = 13" x 15" x 2"; 6S = 11" x 13" x 2"
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel; Integral Emergency Battery
Panel Specifications:	Vandal-Resistant Mylar KAYMAR; Red Letters; Universal Arrows, Double Face
Lamp Specifications:	4 Watt Edge Lit LED Lamp Module for Even Illumination per Code
Energy Efficiency:	>70 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Types:	Recessed Ceiling Mount ... or Surface Ceiling, Wall, or End Mount Designs
Standards & Codes:	UL 924 Listed, NEC, NYC DOB (6" Allowed for NYC Residential), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



Type:	
Model:	
Project:	
Notes:	

Key Features:

USA & NYC APPROVED, VANDAL

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

USA/NYC 8" Surface:	CRE-321802UNIEX-8S-2F-RW-WH
USA/NYC 6" Surface:	CRE-321802UNIEX-6S-2F-RW-WH
Available Options:	May Change Standard Suffix -WH (White) to -BA for Brushed Aluminum Finish
Nominal Dimensions:	8" Model: 15.5" W x 10.5" H x 2.0" D; 6" Model: 12.5" W x 8.0" H x 2.0" D
Housing Specifications:	White Enamel Finish over Code Gauge Steel; Integral Emergency Battery
Panel Specifications:	Vandal-Resistant KAYMAR Thermoplastic; Red Letters; Single or Double Face
Lamp Specifications:	4 Watt Edge Lit LED Lamp Module for Even Illumination per Code
Energy Efficiency:	>70 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Standard Mounting:	Surface Ceiling, Wall, or End Mount, Arrows may be Confirmed in Field for Simplicity
Standards & Codes:	UL 924 Listed, NEC, NYC DOB (6" Allowed for NYC Residential), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**