



**Public Hall**  
[ceiling surface]




15" wide (add **-EM** for emergency battery)

<b>A</b>	<b>CHELSEA-15-BZ</b> (Bronze)
<b>B</b>	<b>CHELSEA-15-BN</b> (Brushed Nickel)
<b>C</b>	<b>MIAMI-15-BZ</b> (Bronze)
<b>D</b>	<b>MIAMI-15-PN</b> (Polished Nickel)
Emergency Backup:	Add Suffix <b>-EM</b> for Integral 90-Minute Emergency Backup; Advise 120V or 277V
Product Dimensions:	15.0" Diameter x 4.5" Depth
Housing Specifications:	Uniform Nickel or Bronze Finish over Code Gauge Steel
Diffuser Specifications:	Frosted KAYMAR Tempered Glass
Lamp Specifications:	LED, 90 CRI, 3000K; 20 Watts; 1660 Lumens
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	83 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling (may Wall Mount) to Recessed Junction Box
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref E180

**Thank you for considering our quality lighting fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)

# LiteStyles™

Public Hall  
[ceiling recessed]

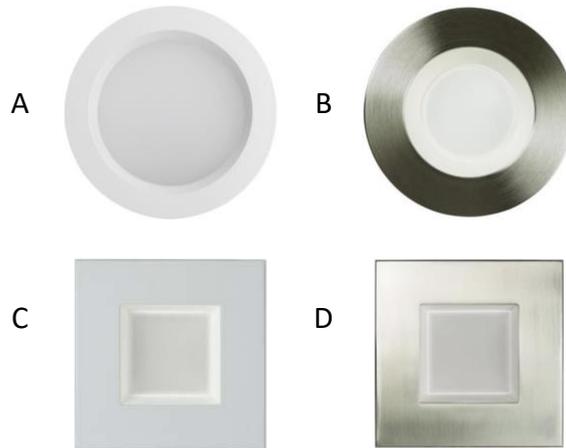


Nominal 4" downlights (add suffix **-EM** for Emergency Battery)

<b>A</b>	<b>SLEEK-LITE-4-RD-WH</b> (White)
<b>B</b>	<b>SLEEK-LITE-4-RD-BN</b> (Brushed Nickel)
<b>C</b>	<b>SLEEK-LITE-4-SQ-WH</b> (White)
<b>D</b>	<b>SLEEK-LITE-4-SQ-BN</b> (Brushed Nickel)
Emergency Backup:	Add Suffix <b>-EM</b> for Integral 90-Minute Emergency Backup; Advise 120V or 277V
Housing Specifications:	12.0" x 9.0" x 4.0" Depth for Shallow Plenum Ceilings
Trim Specifications:	Nominal 4" Aperture; Brushed Nickel ( <b>BN</b> ) or White ( <b>WH</b> ) Textured Finish
Diffuser Specifications:	Frosted Opal KAYMAR Shatterproof Lens
Lamp Specifications:	LED, 80 CRI, 3000K-4000K Available; 21 Watts; 1600 Lumens
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	76 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Recessed Ceiling Mount to Standard Acoustic Tile (SAT) or Gypsum Board Ceilings
Standards & Codes:	ETL Wet Location (May use Outdoors), NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref E162

**Thank you for considering our quality lighting fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



**Public Hall**  
[ADA wall sconces]

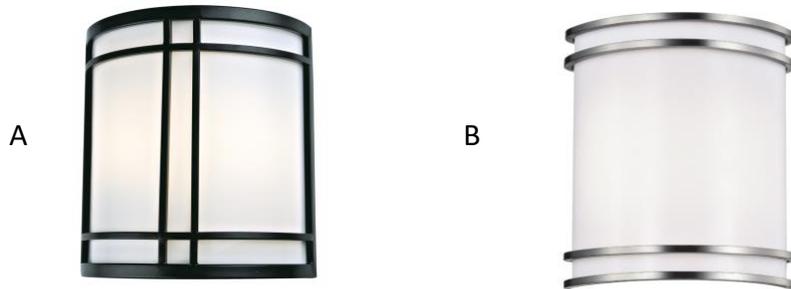

Nominal 10" sconces (suffix **-EM** for battery, **-WH** for White)

<b>A</b>	<b>NEVADA-10-ORB</b> (Oil Rubbed Bronze)
<b>B</b>	<b>KODIAK-10-SN</b> (Satin Nickel)
Emergency Backup:	Add Suffix <b>-EM</b> for Integral 90-Minute Emergency Backup; Advise 120V or 277V
Product Dimensions:	<b>A</b> 11.5" H x 10.7" W x 4.0" Extension <b>B</b> 10.5" H x 9.4" W x 4.0" Extension
Housing Specifications:	Code Gauge Steel finished in ORB/Oil Rubbed Bronze ( <b>A</b> ) or SN/Satin Nickel ( <b>B</b> )
Finish Options:	For all White add Suffix <b>-WH</b> (or Custom Color ~ Please Allow Extra Time to Finish)
Diffuser Specifications:	Shatterproof White Opal DURAC Thermoplastic for Uniform Light Distribution
Lamp Specifications:	LED Module, 80 CRI, 3000K-4000K Available; 15 Watts; 1120 Lumens
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	74 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount to Recessed Junction Box <i>ADA Compliant</i>
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star, ADA
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref E180

**Thank you for considering our quality lighting fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



**Public Hall**  
[surface ceiling or wall]



Nominal 2' or 4' long (add suffix **-EM** for remote battery)

<b>2FT</b>	<b>LINE-LITE-24-WH</b> (White)
<b>4FT</b>	<b>LINE-LITE-48-WH</b> (White)
Available Options:	Suffix <b>-36</b> for 36" Length; Suffix <b>-EM</b> for 90-Minute Remote Emergency Battery
Product Dimensions:	24" or 48" Length x 5.0" Wide x 0.75" Thick
Housing Specifications:	Uniform White Powder Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Lens
Lamp Specifications:	90 CRI, 3K-5K Available <b>2FT</b> 22Watt/1600Lumen <b>4FT</b> 40W/2800L
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	>70 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star; ADA
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref E180

**Thank you for considering our quality lighting fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



**Inside Coves**  
[linkable]



Linkable 1' to 4' cove strips

<b>1FT</b>	<b>LINK-A-LITE-12-WH</b> (White)
<b>2FT</b>	<b>LINK-A-LITE -22.5-WH</b> (White)
<b>3FT</b>	<b>LINK-A-LITE -34-WH</b> (White)
<b>4FT</b>	<b>LINK-A-LITE -46-WH</b> (White)
Actual Lengths:	<b>1FT 12" 2FT 22.5" 3FT 34" 4FT 46"</b> (Linkable; Flex cord is included for corners)
Product Dimensions:	Fixture Length x 1.0" Wide x 1.5" High (From Base to Lens)
Housing Specifications:	Uniform White Finish over Code Gauge Steel, On/Off Switch Included
Diffuser Specifications:	Smooth Opal DURAC Thermoplastic Cover
Lamp Specifications:	LED, 80 CRI, 3000K-4000K Available; 14 Watts; 1050 Lumens (4FT Version)
Energy Efficiency:	75 LPW (Lumens per Watt, 4FT Version), NYECC & NYSERDA Compliant
Mounting Type:	Surface Mount Inside Cove or Under Cabinets by Licensed Electrician; Linkable
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref F90

**Thank you for considering our quality lighting fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



Lobby



Nominal 3' or 4' surface or suspended

<b>Med Pendant</b>	<b>FRISCO-P-33-WH</b> (White)
<b>Large Pendant</b>	<b>FRISCO-P-43-WH</b> (White)
<b>Med Surface</b>	<b>FRISCO-S-33-WH</b> (White)
<b>Large Surface</b>	<b>FRISCO-S-43-WH</b> (White)
Options Available:	Change 43 to <b>60</b> for 60" (Same Specs as 43" Size); Add Suffix <b>-EM</b> for 90-Minute EM
Product Dimensions:	<b>3FT</b> 4" H x .75" W x 32.5" Diameter <b>4FT</b> 4" H x .75" W x 42.5" Diameter
Housing Specifications:	Premium White Finish (or Custom RAL Color) over Heavy Code Gauge Spun Steel Trim
Diffuser Specifications:	Smooth Opal Acrylic Lens, Molded for Strength
Lamp Specifications:	LED, 90 CRI, 3K-3.5K Available <b>3FT</b> 36 Watt/3320 Lumens <b>4FT</b> 48W/4370L
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	91 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Pendant Mount (48" Adjustable Cable) or Surface/Ceiling Mount
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref G7200

**Thank you for considering our quality lighting fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



Lobby



20" or 28" bowls, adjustable height

<b>20" DIA</b>	<b>ROOSEVELT-20-BN</b> (Brushed Nickel)
<b>28" DIA</b>	<b>ROOSEVELT-28-BN</b> (Brushed Nickel)
Finish Options:	Change Suffix <b>-BN</b> to <b>-ORB</b> for Oil Rubbed Bronze (see Photo on right)
Product Dimensions:	20.0" Diameter x 22" High or 28.0" Diameter x 30.0" High (+ 6' Adjustable Chain)
Housing Specifications:	Uniform Brushed Nickel (BN) or Oil Rubbed Bronze (ORB) over Code Gauge Steel
Diffuser Specifications:	Premium Real White Alabaster Glass Sourced for Color Consistency
Lamp Specifications:	LED, 80 CRI, 27K-4K Available <b>20"</b> 27W/2490 Lumens <b>28"</b> 45W/4150 Lumens
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	92 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Suspended from Ceiling; 6 Foot Adjustable Chain is Included (may extend by other)
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref G1800

**Thank you for considering our quality light fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



Inside Lobby or  
Outside Entry  
[wall sconce]




31" tall (indoor/outdoor)

<b>Nickel</b>	<b>FAIRFIELD-31-BN</b> (Brushed Nickel)
<b>Bronze</b>	<b>FAIRFIELD-31-BZ</b> (Bronze)
Options Available:	Add Suffix <b>-EM</b> for Integral 90-Minute Emergency Backup (other finishes available)
Product Dimensions:	31.0" H x 8.25" W x 4.0" Extension from Wall (ADA Complaint)
Housing Specifications:	Uniform Brushed Nickel ( <b>BN</b> ) or Bronze ( <b>BZ</b> ) Finish over Code Gauge Steel
Diffuser Specifications:	High Impact Opal DURAC Thermoplastic
Lamp Specifications:	23 Watt LED, 82 CRI, 3000K-4000K Available, 2762 Lumens
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	120 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount to Recessed Junction Box (ADA Compliant); Indoor or Outdoor
Standards & Codes:	UL Listed Dry or Wet Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star, ADA
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref G630

**Thank you for considering our quality light fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



Offices or  
Common Areas  
[recessed or surface]

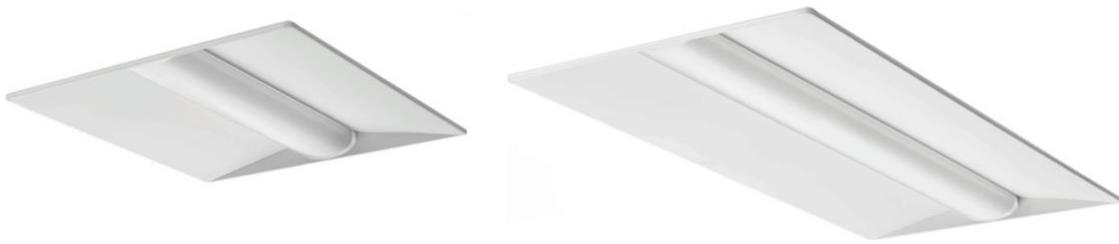

2'x2' or 2'x4' (add suffix **-EM** for emergency battery)

<b>2X2</b>	<b>CENTER-CURVE-R-2X2</b> (2x2 Recessed)
<b>2X4</b>	<b>CENTER-CURVE-R-2X4</b> (2x4 Recessed)
Available Options:	Change <b>R</b> (Recessed) to <b>S</b> for Surface Mount    Add Suffix <b>-EM</b> for Battery Backup
Product Dimensions:	<b>2X2</b> 24" x 24" x 2.5" Shallow Plenum <b>2X4</b> 48" x 48" x 2.5" Shallow Plenum
Housing Specifications:	Uniform Baked White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Lens
LED Lamp Module:	80 CRI, 3K-5K Available <b>2X2</b> 42W/4365 Lumen <b>2X4</b> 52W/5918 Lumen
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	<b>2X2</b> 103 LPW (Lumens per Watt) <b>2X4</b> 113 LPW    (NYECC & NYSERDA Compliant)
Standard Mounting:	Recesses into Standard Acoustic Tile; Add Suffix <b>-FL</b> for Gypsum Board Ceilings
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC Certified
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref H144

**Thank you for considering our quality light fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)



Offices or  
Common Areas  
[various mountings]



Add suffix **-EM** for Emergency battery

<b>1X4</b>	<b>RAZOR-LITE-R-1X4</b> (1x4 Recessed)
<b>2X2</b>	<b>RAZOR-LITE-R-2X2</b> (2x2 Recessed)
<b>2X4</b>	<b>RAZOR-LITE-R-2X4</b> (2x4 Recessed)
Available Options:	Change <b>R</b> (Recess) to <b>S</b> for Surface, <b>P</b> for Pendant/Aircraft Cable; Add <b>-EM</b> for Battery
Product Dimensions:	12" x 48", 24" x 24", 24" x 48" .... All Sizes are 2.0" Deep
Housing Specifications:	Uniform Baked White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Lens
LED Lamp Module:	80 CRI, 3K-5K Available <b>1X4 &amp; 2X2</b> 40W/4134 Lumen <b>2X4</b> 50W/5150L
Dimming Option:	Add Suffix <b>-DIM</b> for LED Dimming Module
Energy Efficiency:	103 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Standard Mounting:	Recesses into Standard Acoustic Tile; Add Suffix <b>-FL</b> for Gypsum Board Ceilings
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number, ref H135

**Thank you for considering our quality light fixtures.** Due to continuously advancing technology and code updates, specifications & dimensions are subject to change without notice. [www.ULGroupUSA.com](http://www.ULGroupUSA.com)