

creLED



I----- 13" or 16" -----I
Surface Ceiling

Type:	
Model:	
Project:	
Notes:	

Key Features: **TAPERED DESIGN, SHATTERPROOF**

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 13" Model:	CRE-011802660-13-13L-BN
Standard 16" Model:	CRE-011802660-16-25L-BN
Available Options:	May Change BN (Brushed Nickel) to WH (White) or PB (Polished Brass)
Nominal Dimensions:	13.0" Diameter x 3.0" Depth ... or 16.0" Diameter x 3.5" Depth
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal KAYMAR Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, >83 CRI, 3K-4K; 13" @ 13W/1450 Lumens, 16" @ 25W/2900 Lumens
Energy Efficiency:	111 (13") or 116 (16") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling Mount to Recessed Junction Box
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



|----- 12 " or 14" -----|
Surface Ceiling (or Wall)

Type:	
Model:	
Project:	
Notes:	

Key Features:
SHATTERPROOF, MAY WALL MOUNT

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 12" Model:	CRE-021802DCO-12-15L-BN
Standard 14" Model:	CRE-021802DCO-14-21L-BN
Available Options:	May Change BN (Brushed Nickel) to PB (Polished Brass) or ORB (Oil Rubbed Bronze)
Nominal Dimensions:	12.0" Diameter x 3.5" Depth ... or 14.0" Diameter x 4.0" Depth
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, > 80 CRI, 3K-4K; 12" @ 15W/1100 Lumens, 14" @ 21W/1600 Lumens
Energy Efficiency:	73 (12") or 76 (14") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



I----- 11" or 14" -----I
Surface Ceiling (or Wall)

Type:	
Model:	
Project:	
Notes:	

Key Features:

SHATTERPROOF, MAY WALL MOUNT

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 11" Model:	CRE-031802LEDR-11-15L-WH
Standard 14" Model:	CRE-031802LEDR-14-24L-WH
Available Options:	Please Browse Through our Other Fixtures to Meet Your Project Needs
Nominal Dimensions:	11.0" Diameter x 4.0" Depth ... or 14.0" Diameter x 4.0" Depth
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, >80 CRI, 27K-4K; 11" @ 15W/1100 Lumens, 14" @ 24W/1578 Lumens
Energy Efficiency:	73 (11") or 65 (14") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



Type:	
Model:	
Project:	
Notes:	

I- - - - - 11" or 14" Square - - - - -I
Surface Ceiling (or Wall)

Key Features:
SHATTERPROOF, MAY WALL MOUNT

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard 11" Model:	CRE-041802LEDS-11-15L-WH
Standard 14" Model:	CRE-041802LEDS-14-25L-WH
Available Options:	Please Browse Through our Other Fixtures to Meet Your Project Needs
Nominal Dimensions:	11.0" Square x 3.25" Depth ... or 14.0" Square x 3.25" Depth
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, >80 CRI, 27K-4K; 11" @ 15W/1087 Lumens, 14" @ 25W/1605 Lumens
Energy Efficiency:	72 (11") or 64 (14") LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



11.75" x 7.5"
Wall Sconce

Type:	
Model:	
Project:	
Notes:	

Key Features:

ADA COMPLIANT, SHATTERPROOF

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-051802HOSP-12X8-13L-BN
Available Options:	May Change BN (Brushed Nickel) to BB (Brushed Brass)
Nominal Dimensions:	11.75" High x 7.5" Wide x 4.0" Depth
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 13 Watts, 1540 Lumens, >83 CRI, 3000K-4000K
Energy Efficiency:	111 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



|----- 14" -----|

Wall Sconce

Type:	
Model:	
Project:	
Notes:	

Key Features:

ADA COMPLIANT, SHATTERPROOF

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-0618026014-14X7-13L-PN
Available Options:	May Change PN (Polished Nickel Trim) to WH (All White)
Nominal Dimensions:	14.0" Wide x 7.0" High x 4.0" Depth
Housing Specifications:	Uniform Polished Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth White DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 13 Watts, 1540 Lumens, >83 CRI, 3000K-4000K
Energy Efficiency:	111 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount (ADA Compliant) to Recessed Junction Box
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



2" Recessed Downlights



Type:	
Model:	
Project:	
Notes:	

Key Features:
MINI APERTURE, WET RATED

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Round Model:	CRE-071802BRK-2IN-9L-WRB (White Round Baffle)
Square Model:	CRE-071802BRK-2IN-9L-WSB (White Square Baffle)
Adjustable Model:	CRE-071802BRK-2IN-9L-WGR (White Gimbal Ring)
Nominal Dimensions:	Trim: 2.0" ID, 3.125" OD; Housing: 12.0" L x 7.5" W x 4.5" Deep
Housing Specifications:	Code Gauge Steel; IC Rated; Air Tight (Note Shallow 4.5" Depth Inside Ceiling)
Trim Specifications:	Durable Opal Thermoplastic Construction; Non-Conductive for Added Safety
Lamp Specifications:	Dimmable LED, 8.8 Watts, 620 Lumens, >90 CRI, 3000K
Energy Efficiency:	70 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Recessed into Most Standard Acoustic Tile and Gypsum Board Ceilings
Standards & Codes:	UL Listed Dry, Damp or Wet Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



4" Recessed Downlights



Type:	
Model:	
Project:	
Notes:	

Key Features:

DIMMABLE, SHALLOW DESIGN

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Round Model:	CRE-081802BRK-4IN-10L-WRB (White Round Baffle)
Square Model:	CRE-081802BRK-4IN-10L-WSB (White Square Baffle)
Adjustable Model:	CRE-081802BRK-4IN-10L-WGR (White Gimbal Ring)
Nominal Dimensions:	Trim: 3.5" ID, 5.2" OD; Housing: 9.25" L x 6" W x 5.5" Deep
Housing Specifications:	Code Gauge Steel; IC Rated; Air Tight (Note Shallow 5.5" Depth Inside Ceiling)
Trim Specifications:	Durable Opal Thermoplastic Construction; Non-Conductive for Added Safety
Lamp Specifications:	Dimmable LED, 10 Watts, 675 Lumens, >82 CRI, 2700K-4000K
Energy Efficiency:	67 LPW (Lumens per Watt), NYECC & NYSEDA Compliant
Mounting Type:	Recessed into Most Standard Acoustic Tile and Gypsum Board Ceilings
Standards & Codes:	ETL Wet Locations (Gimbal Ring is Damp), NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



Type:	
Model:	
Project:	
Notes:	

Key Features: OVAL DESIGN, SHATTERPROOF

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-101802OVAL-32X18-35L-BN
Available Options:	Please Browse Through our Other Fixtures to Meet Your Project Needs
Nominal Dimensions:	32.5" x 18.0" Oval, 4.5" Depth
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 35 Watts, 2600 Lumens, > 81CRI, 3000K-4000K
Energy Efficiency:	74 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling Mount (or Wall Mount) to Recessed Junction Box
Standards & Codes:	UL Listed Dry Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



|----- 24" -----|
Surface Wall

Type:	
Model:	
Project:	
Notes:	

Key Features: **SHATTERPROOF ADA VANITY**

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-121802250-24-18L-PC
Available Options:	Also Available in 36" and 48" (Add Suffix to Catalog Number -36" or -48")
Nominal Dimensions:	24.0" Long x 4.75" High x 4.0" Extension
Housing Specifications:	Uniform White Enamel Finish over Code Gauge Steel
Diffuser Specifications:	White Opal Shatterproof Thermoplastic, Asbestos Free, UV Stabilized, Chrome Trim
Lamp Specifications:	Replaceable LED, 18 Watts, 2200 Lumens, >80 CRI, 3500K-5000K
Energy Efficiency:	122 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount (ADA Compliant) to Recessed Narrow Junction Box
Standards & Codes:	UL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, DLC LP Source
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED



Type:	
Model:	
Project:	
Notes:	


Key Features: SLEEK VANITY

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-1318025524-25-17L-PC
Available Options:	Also Available in 37.5" and 47.5" (Add Suffix to Catalog Number -37.5" or -47.5")
Nominal Dimensions:	25.5" Long x 4.8" High x 4.5" Extension
Housing Specifications:	Uniform Brushed Nickel Finish over Code Gauge Steel
Diffuser Specifications:	Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	LED, 17.4 Watts, 1519 Lumens, >80 CRI, 3000K-4000K
Energy Efficiency:	87 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Wall Mount to Recessed Narrow Junction Box
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED

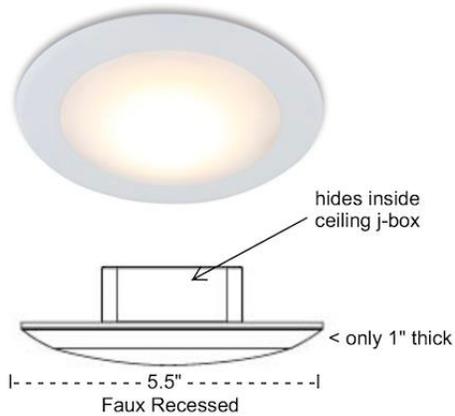

Type:	
Model:	
Project:	
Notes:	

Key Features:

FOR SHOWERS OR SHALLOW CEILINGS

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-141802WET-5-8L-WH
Available Options:	Please Browse Through our Other Fixtures to Meet Your Project Needs
Nominal Dimensions:	5.5" OD x 1.0" Below Ceiling Line (LED Driver Hides Inside Junction Box)
Housing Specifications:	Uniform White Thermoplastic and Code Compliant Electrical Compartment
Diffuser Specifications:	Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 8 Watts, 700 Lumens, >80 CRI, 2700K-3500K
Energy Efficiency:	87 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling Mount to Standard 4" Recessed Junction Box
Standards & Codes:	ETL Listed Dry, Damp or Wet Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**

creLED

Runs COOL for Extra Fire-Resistance



|- - - - - 9" - - - - -|
Surface Ceiling or Wall

Type:	
Model:	
Project:	
Notes:	

Key Features:

RUNS COOL FOR FIRE SAFETY

creLED is a recognized industry leader in innovative energy-efficient LED illumination. **creLED** utilizes only the most trusted and proven of LED components, while adhering to relevant international, national, and local codes and regulations. LEDs are sourced for color consistency, housings are manufactured of code gauge metals, and diffusers are sourced from asbestos-free, UV stabilized plastics or tempered glass where applicable.

Standard Model:	CRE-151802COOL-9-16L-WH
Available Options:	May Change WH (White) to BN (Brushed Nickel) or BZ (Bronze)
Nominal Dimensions:	9.0" Diameter x 1.0" Below Ceiling Line (LED Driver Hides Inside Junction Box)
Housing Specifications:	Uniform Premium White Finish over Code Gauge Steel
Diffuser Specifications:	Smooth Opal DURAC Shatterproof Thermoplastic, Asbestos Free, UV Stabilized
Lamp Specifications:	Dimmable LED, 16 Watts, 1300 Lumens, >90 CRI, 3000K
Energy Efficiency:	81 LPW (Lumens per Watt), NYECC & NYSERDA Compliant
Mounting Type:	Surface Ceiling or Wall Mount (ADA Compliant) to 4" Recessed Junction Box
Standards & Codes:	ETL Listed Dry or Damp Locations, NEC 1.08, NYC DOB (IBC), NJEC, Energy Star
Certifications:	Registered by Product Code, Unique ID, SKU, or Calendar Number

Thank you for considering creLED quality light fixtures. Due to ever-advancing technology and code updates, specifications & dimensions are subject to change without notice. **Support@creLED.com**